




B-series

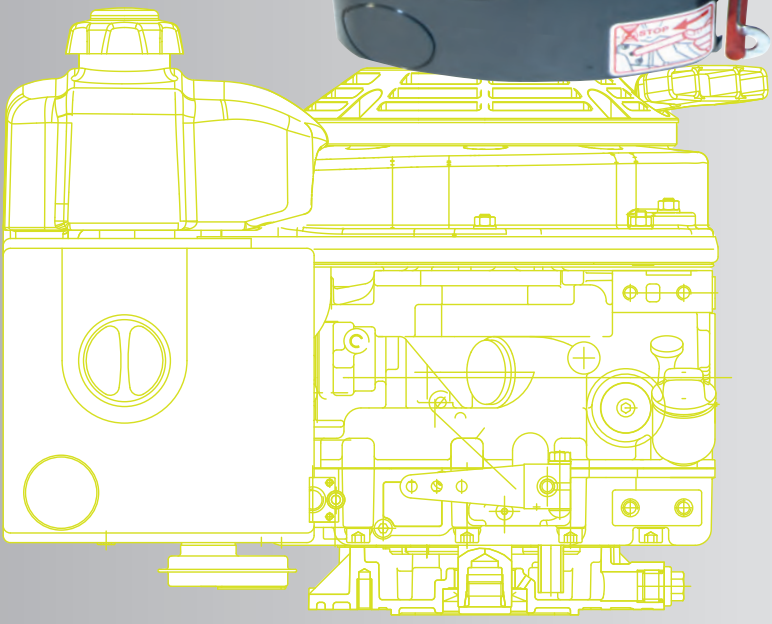

1B20V • 1B30V • 1B40V • 1B50V

1B20V • 1.4-3.5 kW 1B30V • 2.1-5.4 kW  
1B40V • 3.2-7.5 kW 1B50V • 3.5-8.0 kW

THE CHALLENGERS:  
AIR COOLED SINGLE-CYLINDER DIESEL  
WITH VERTIKAL SHAFT

## DESIGN

- Air-cooled single-cylinder 4-stroke Diesel engine.
- Horizontal cylinder.
- Light alloy diecast cylinder crankcase.
- Light alloy cylinder head.
- Forged crankshaft.
- Light alloy piston for low free forces of gravity.
- Lubrication by pressurised circulation of oil, fine screen filtering in main flow.
- Valve control by rocker, push-rods, tappets and camshaft.

## CHARACTERISTICS

- Direct injection.
- Compression from 1:20.5 to 1:22. Good cold start performance.
- Fuel orientated mixture preparation. Result: excellent exhaust quality.  
Certificates from EPA and CARB.
- Speed regulation by spring-loaded governor.  
Proportionality < 5% at 3000 / 3600 r.p.m.
- The control cover houses the governor, the entire valve drive, the injector pump drive, the automatic decompression system and oil pump.
- Oil drain on both (narrow) sides of the engine. This gives free access of at least one drain position for almost all installations.
- Dry air filter with paper cartridge and integrated pre-cleaner.
- Cooling fan and AC generator incorporated in the flywheel (not sensitive to dust).
- Exhaust outlet flexible as regards both position and direction of exit.

EXHAUST REDUCED TYPES  
ON REQUEST

**EPA TIER IV**  
**CARB TIER IV**







TECHNICAL DATA		1B20V	1B30V	1B40V	1B50V
▶ Number of cylinders		1	1	1	1
▶ Bore x stroke	mm	69 x 65	80 x 69	88 x 76	93 x 76
	inches	2.72 x 2.56	3.15 x 2.72	3.46 x 2.99	3.66 x 2.99
▶ Displacement	l	0.243	0.347	0.462	0.517
	cu.in.	14.82	21.18	28.19	31.55
▶ Mean piston speed at 3000 r.p.m.	m/s	6.5	6.9	7.6	7.6
	ft/min	1280	1358	1496	1496
▶ Compression ratio		22	21.5	21	20.5
▶ Lub. oil consumption, related to full load		max. 1 % of fuel consumption			
▶ Lub. oil capacity max. / min.	l	0.9 / 0.4	1.1 / 0.6	1.5 / 0.7	1.55 / 0.75
	US qts	0.95 / 0.42	1.16 / 0.63	1.59 / 0.74	1.64 / 0.77
▶ Speed control	Idle speed	approx. 1000 r.p.m.			approx. 800 r.p.m.
	static speed droop	approx. 5% bei 3000 r.p.m.			

## TORQUE

— = at F-power according to DIN ISO 1585

- - - = at B-power according to ISO 3046-1

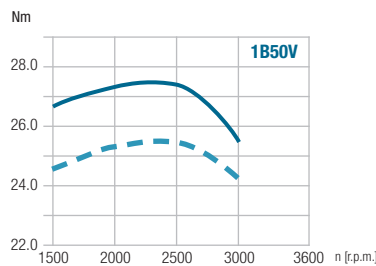
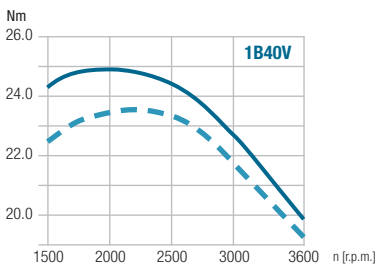
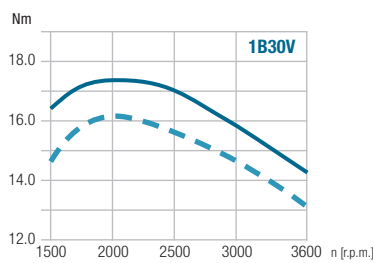
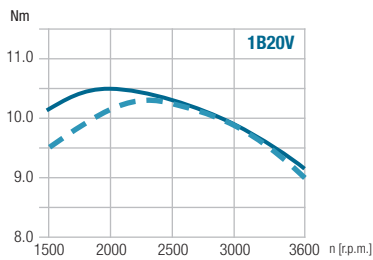


▶ Performance data refer to Standard Reference Conditions of ISO 3046-1:  
+ 25 °C (77 °F), 100 kPa, relative humidity 30 %.  
During running-in period the output increases by approx. 5 % which is taken into consideration at delivery.  
Power reduction acc. to ISO 3046-1.  
Standard values: Above 100 m ALT approx. 1 % per 100 m.  
Above 25 °C (77 °F) approx. 4 % per 10 °C (50 °F).  
The power taken from charging alternator also has to be added to the demand of power.

## SPECIFIC FUEL CONSUMPTION

— = at F-power according to DIN ISO 1585

- - - = at B-power according to ISO 3046-1

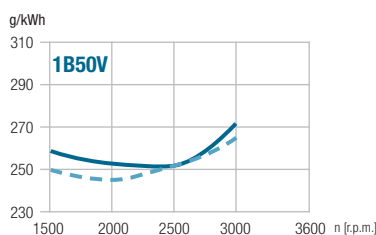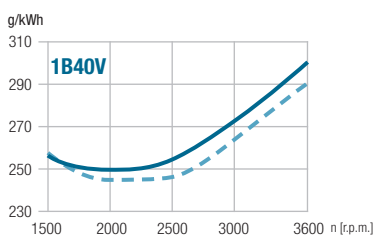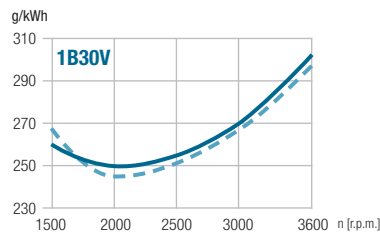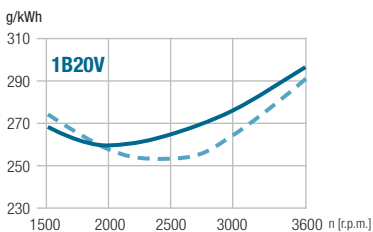

INSTALLATION DATA		1B20V	1B30V	1B40V	1B50V
▶ Combustion air required at 3000 r.p.m. approx. <sup>1)</sup>	m <sup>3</sup> / min	0.35	0.52	0.69	0.78
	cu.ft./min	12	18	24	28
▶ Cooling air required at 3000 r.p.m. approx. <sup>1)</sup>	m <sup>3</sup> / min	4.2	6.0	7.3	7.6
	cu.ft./min	148	212	257	268
▶ Starter		12 V - 1.0 kW – 24 V - 1.6 kW			
▶ Alternator charging current at 3000 / 1500 r.p.m.		14 V - 14 A / 7 A – 28 V - 10 A / 5 A			
▶ Battery capacity	min / max Ah	12 V - 36 / 60 Ah – 24 V - 24 / 44 Ah			

<sup>1)</sup> For other r.p.m. there is a linear reduction in the air requirements

## PERMISSIBLE LOAD ON POWER-TAKE-OFF POINTS

### 1B20V / 1B30V

max. permissible radial force

$$F_1 = \frac{60\,000}{L \text{ (mm)} - 70} \text{ (N)}$$

max. permissible axial force

$$F_2 = 800 \text{ (N)}$$


### 1B40V/W / 1B50V/W

max. permissible radial force

$$F_1 = \frac{62\,600}{L \text{ (mm)} - 84} \text{ (N)}$$

max. permissible axial force

$$F_2 = 1200 \text{ (N)}$$

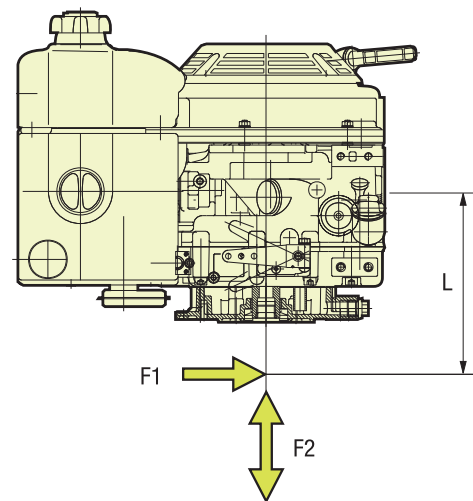

1


## MAINTENANCE AND OPERATING POINTS

To achieve the engine's maximum life, it is essential that the engine gets serviced meticulously at regular intervals.

During your first installation please make sure that easy accessibility of service and operating points is assured.

The easier the accessibility is, the sooner and more conscientious the engine will be maintained.

Please convince yourself personally that all service and operation points are easily accessible before delivering your machine to the customer.

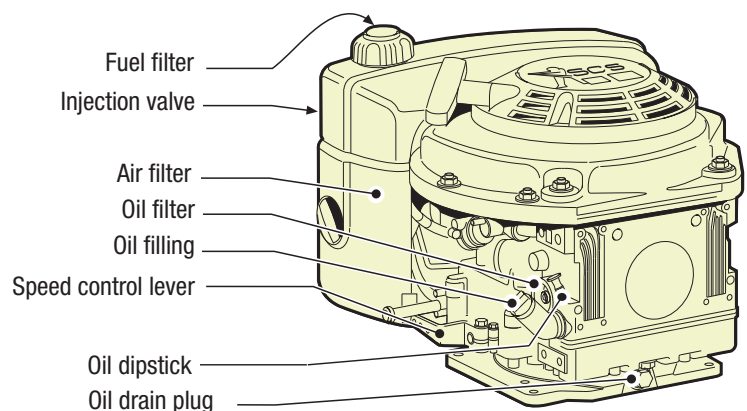

2

## ELECTRICAL EQUIPMENT

Starter-switchboard-instruments incl. LED-display are mounted to the engine or will be delivered upon request as switchboard-instruments with cable (2m) loose. The engine is started and controlled from this instrument box. Instrument box and cable harness are part of the additional equipment and supplied according to the number of electrical safety features which are required. If the engine has to be

started at temperatures below - 10 °C, engine must be fitted with a pre-heating system (glow plug) (additional equipment). Further additional equipments include automatic start and stop, remote control etc.

Please ask for drawings and wiring diagrams.

[www.hatz-diesel.com](http://www.hatz-diesel.com)

## POWER-TAKE-OFF AND SENSE OF ROTATION

- Power-take-off shaft, governor side, with max. engine speed, 100 %. Different stub-shafts (pic. 6) Radial loading capacity, see pic. 1.
- Power take-off at crankshaft - governor side with engine speed, sense of rotation anti-clockwise (fig. 3)

## ENGINE MODELS

- **Version 1B20V** :1500 r.p.m. bis 3600 r.p.m.
- **Version 1B30V** :1500 r.p.m. bis 3600 r.p.m.
- **Version 1B40V** :1500 r.p.m. bis 3600 r.p.m.
- **Version 1B40W** :1500 r.p.m. bis 3600 r.p.m.
- **Version 1B50V** :1500 r.p.m. bis 3000 r.p.m.
- **Version 1B50W** :1500 r.p.m. bis 3000 r.p.m.

**V:** without additional counter balance

**W:** with additional counter balance

## ENGINE VARIANTS

- Engine with recoil-start on flywheel side (fig 4).
- Engine with electric start 12 V and Recoil-start (fig. 5).
- Engine with electric start 24 V and Recoil-start (fig. 5).

## WEIGHT incl. tank, air filter, and exhaust silencer

	<b>1B20V</b>		<b>1B30V</b>		<b>1B40V</b>		<b>1B50V</b>	
	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.
Engine with recoil-start	30.0	66.1	37.0	81.6	50.0	110.2	53.2	117.3
Engine with electric start	34.8	76.7	41.8	92.1	55.3	121.9	58.5	128.9




## SCOPE OF DELIVERY OF ENGINE IN STANDARD EQUIPMENT

Engine tested for full load on test bench. Engine fitted with blower fan, variable speed governor, lubricating oilfilter, dry-type airfilter or oil-bath airfilter, automatic decompression system, automatic injection pump bleeding, filling device for start oil, strap for transportation (only suitable to carry the engine weight).

Light metal housing not painted. Sheet metal parts painted.

Engine without oil.

**Accessories:** Gaskets for 1st maintenance

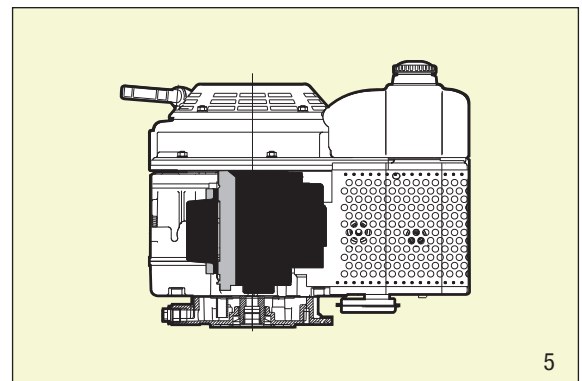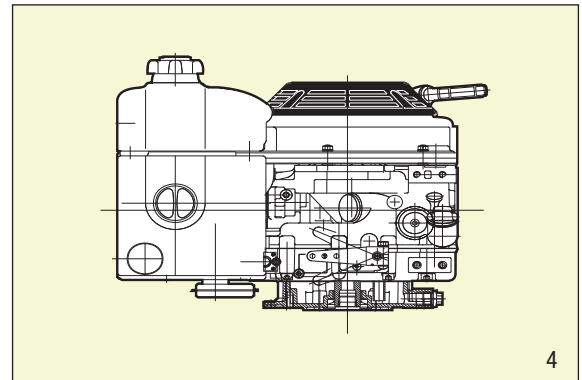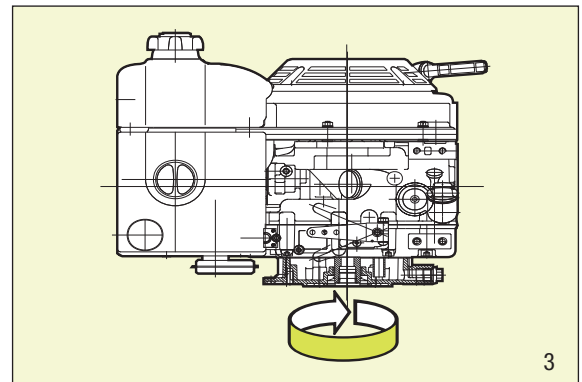

## ADDITIONAL EQUIPMENT


Thanks to the complete programme of additional equipment every engine can be adapted to the special requirements of every application. As a minimum, every engine needs the “additional equipment, necessary for operation”.

You find out details at our HATZ-contracting partners.

PERFORMANCE TABLE			1B20V		1B30V		1B40V		1B50V	
Norm	Hatz-Spec.	r.p.m.	kW*	HP*	kW*	HP*	kW*	HP*	kW*	HP*
▶ Vehicle output acc. to DIN ISO 1585.	NF	3600	3.5	4.8	5.4	7.3	7.5	10.2	—	—
		3000	3.1	4.2	5.0	6.8	7.1	9.7	8.0	10.9
		2600	2.8	3.8	4.6	6.3	6.6	9.0	7.4	10.1
		2300	2.5	3.4	4.1	5.6	6.0	8.2	6.6	9.0
		2000	2.2	3.0	3.6	4.9	5.2	7.2	5.7	7.8
		1800	1.9	2.6	3.3	4.5	4.6	6.3	5.1	6.9
		1500	1.6	2.2	2.6	3.5	3.8	5.2	4.2	5.7
▶ ISO net brake fuel stop power (IFN) for strong intermittent load acc. to ISO 3046-1.	NB	3600	3.4	4.6	5.0	6.8	7.3	9.9	—	—
		3000	3.1	4.2	4.6	6.3	6.8	9.2	7.6	10.3
		2600	2.8	3.8	4.2	5.7	6.3	8.6	6.9	9.4
		2300	2.5	3.4	3.9	5.3	5.7	7.8	6.2	8.4
		2000	2.1	2.9	3.4	4.6	4.9	6.7	5.3	7.2
		1800	1.9	2.6	3.0	4.1	4.4	6.0	4.7	6.4
		1500	1.5	2.0	2.3	3.1	3.5	4.8	3.9	5.3
▶ ISO-standard power (ICXN) (10% overload permissible) ▶ ISO-standard fuel stop power (no overload permissible) acc. to ISO 3046-1. For constant speed and constant load (ICFN).	NS (NA)	3600	3.1	4.2	4.5	6.1	6.5	8.8	—	—
		3000	2.8	3.8	4.2	5.7	6.1	8.3	6.8	9.2
		2600	2.5	3.4	3.8	5.2	5.6	7.6	6.2	8.4
		2300	2.2	3.0	3.5	4.8	5.1	6.9	5.5	7.5
		2000	1.9	2.6	3.1	4.2	4.4	6.0	4.8	6.5
		1800	1.7	2.3	2.7	3.7	3.9	5.3	4.2	5.7
		1500	1.4	1.9	2.1	2.9	3.2	4.4	3.5	4.8

\* Performance specifications without exhaust certificates. Performance tables with exhaust certificates upon request.

## SELECTION OF AVAILABLE SHAFT FORMS

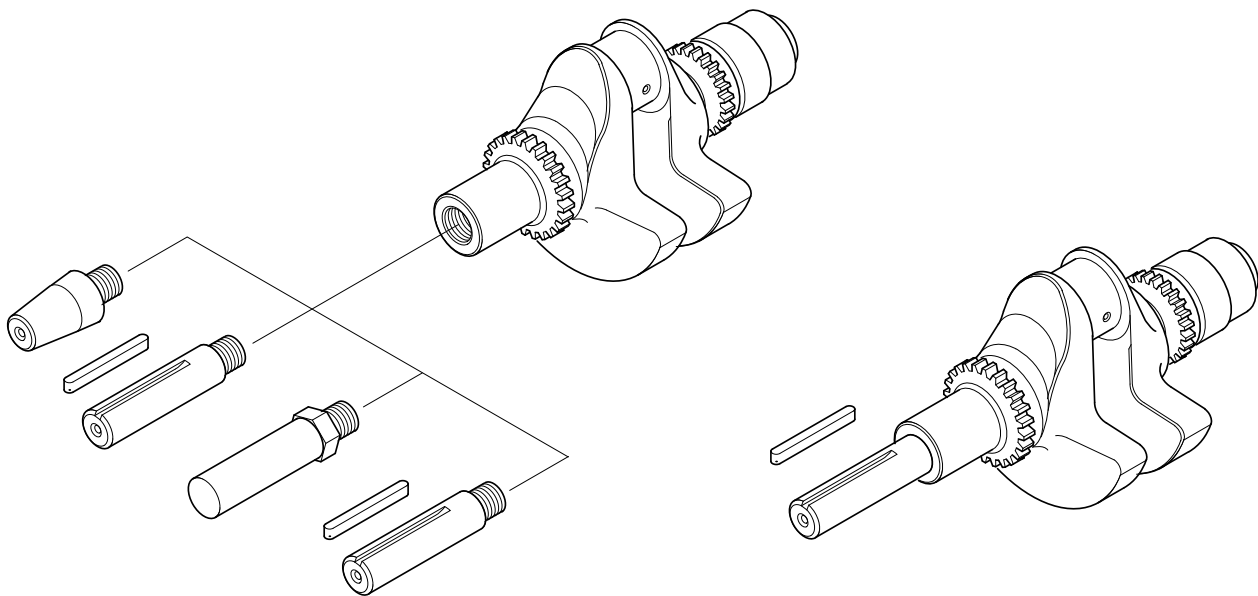

**1B20V - 1B30V - 1B40V/W - 1B50V/W**  
Version for retrofit shafts



**1B40V/W - 1B50V/W**  
cyl. with thread  $\varnothing$  1"

# DIMENSIONS





Spread at outlines  $\pm 3$  mm due to tolerance.

## 1B20V / 1B30V

## 1B40V/W / 1B50V/W

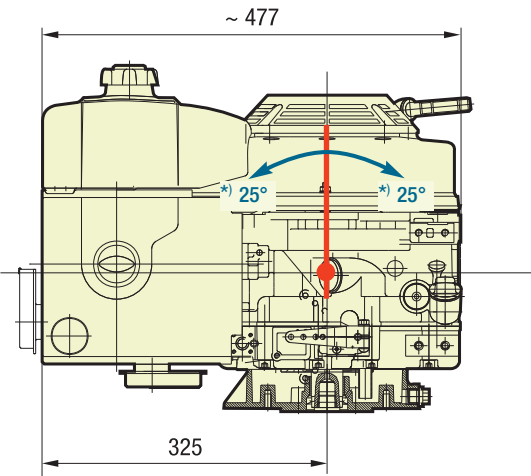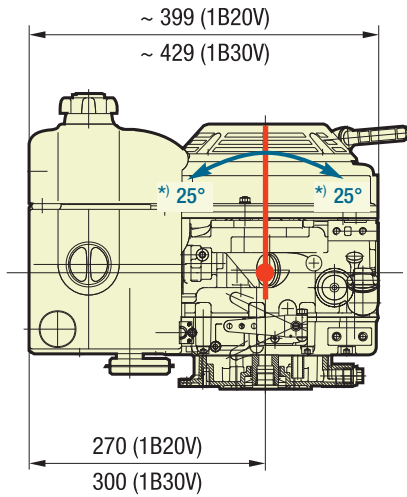

\*) max. permanent tilting

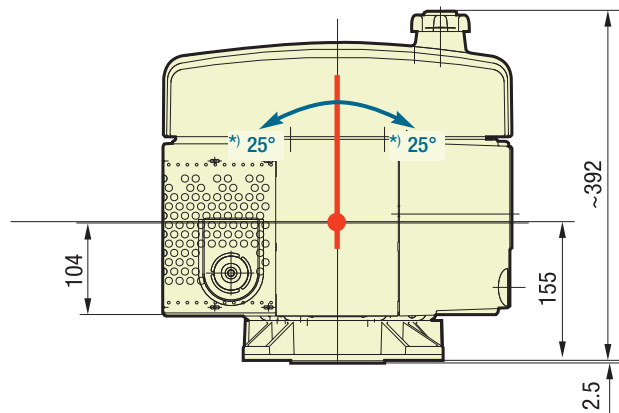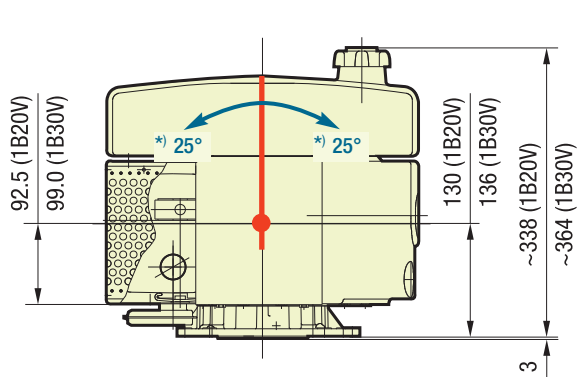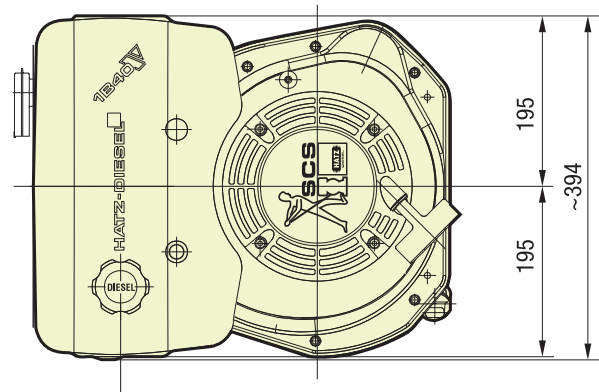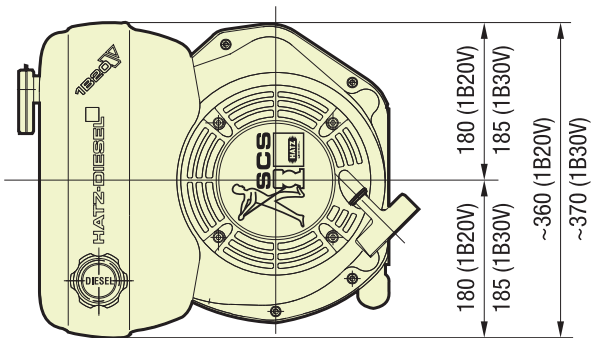

► Drawings with detailed - and connection measures can either be demanded or downloaded as pdf- resp. dxf-file which are shown in the Internet.



**MOTORENFABRIK HATZ**  
**GMBH & CO. KG**  
Ernst-Hatz-Straße 16  
94099 Ruhstorf  
GERMANY

Telephone: +49 8531 319-0  
Telefax: +49 8531 319-418  
marketing@hatz-diesel.de

[www.hatz-diesel.com](http://www.hatz-diesel.com)



5 / 700 385 82 - ENG - 05.10 - 1 Printed in Germany  
Modifications, which serve the technical improvements, are reserved.